

FIG. 1

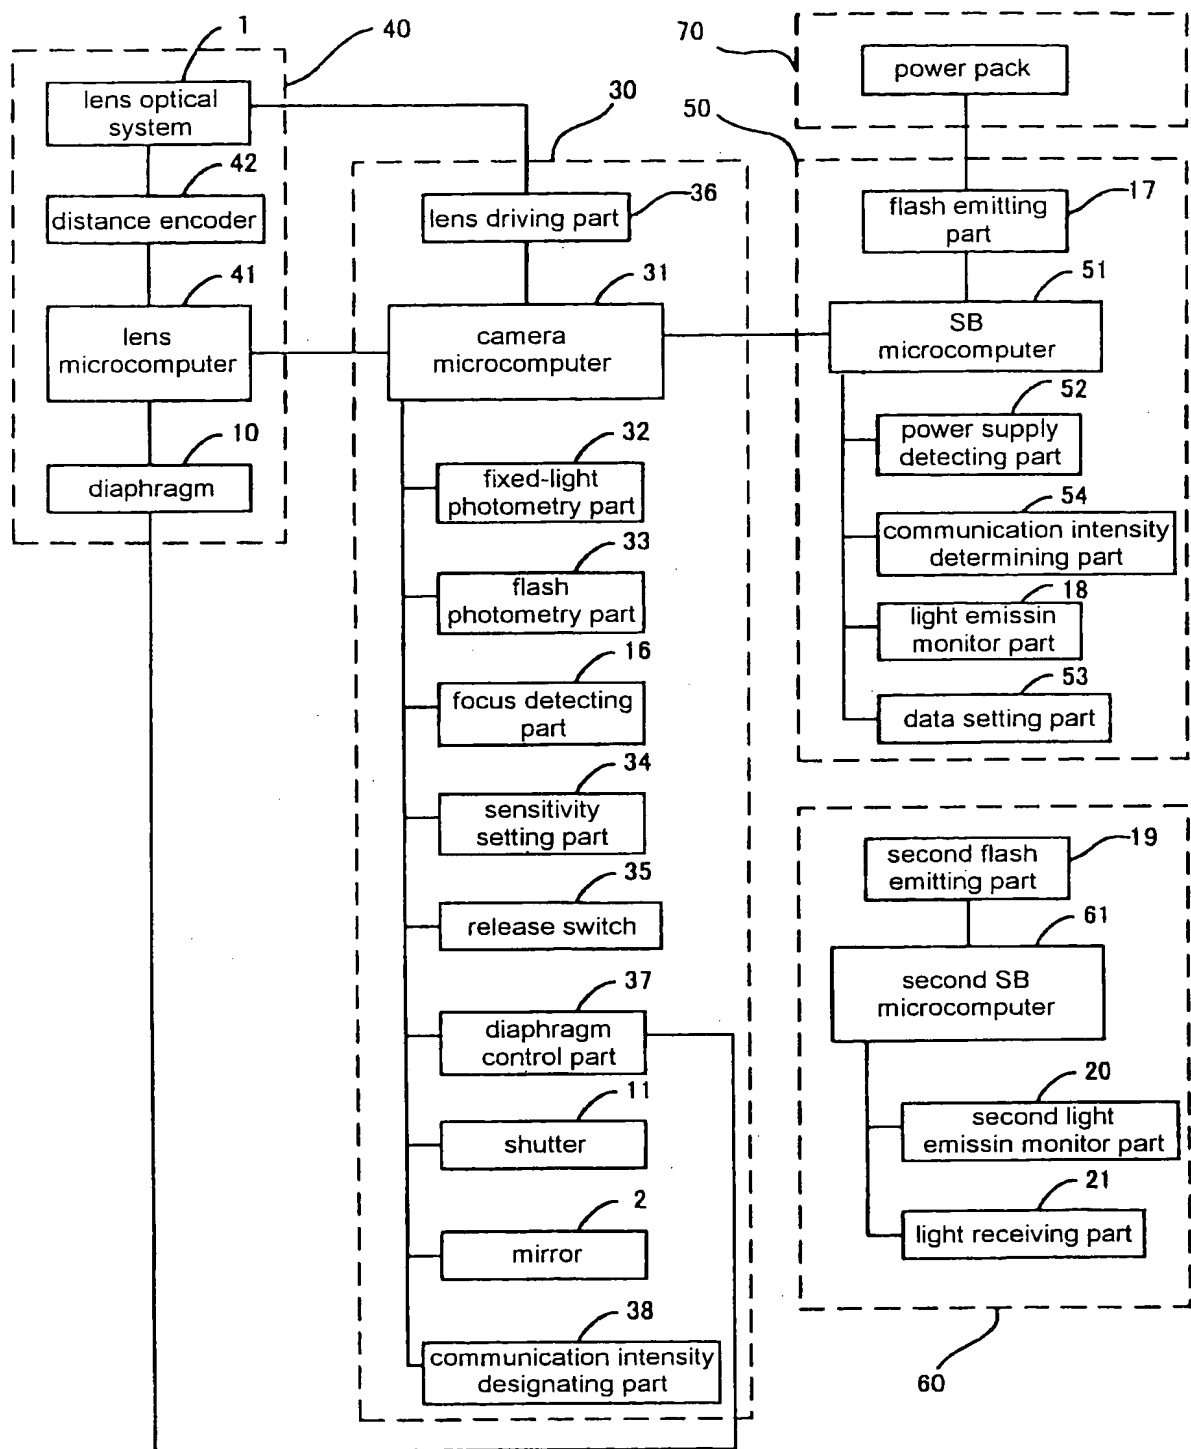


FIG. 2


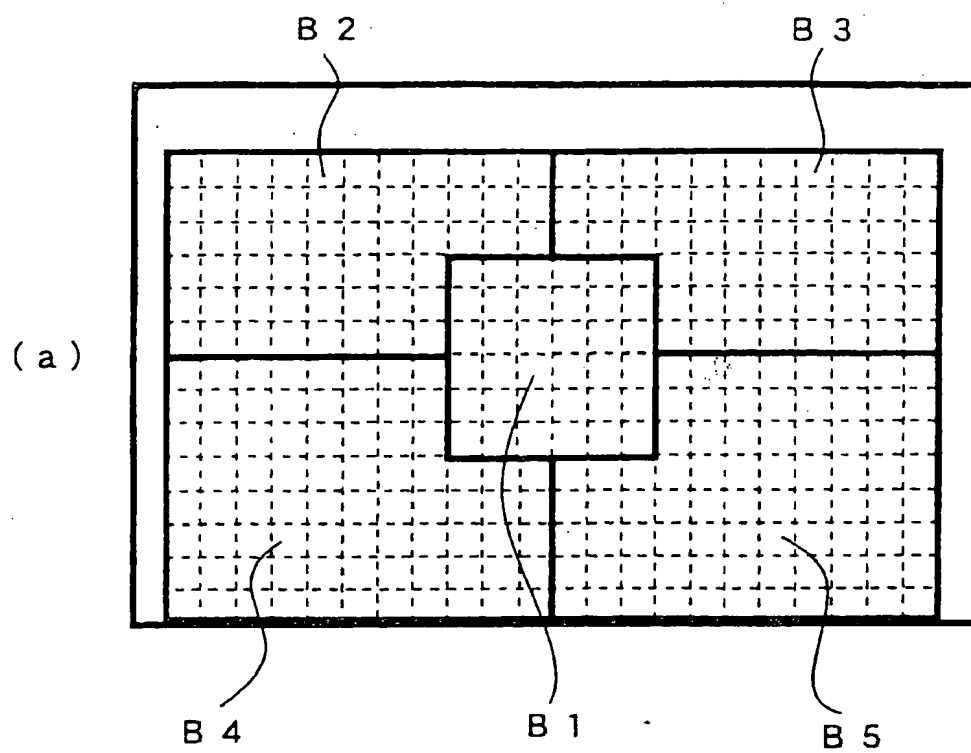


FIG. 3

(a)

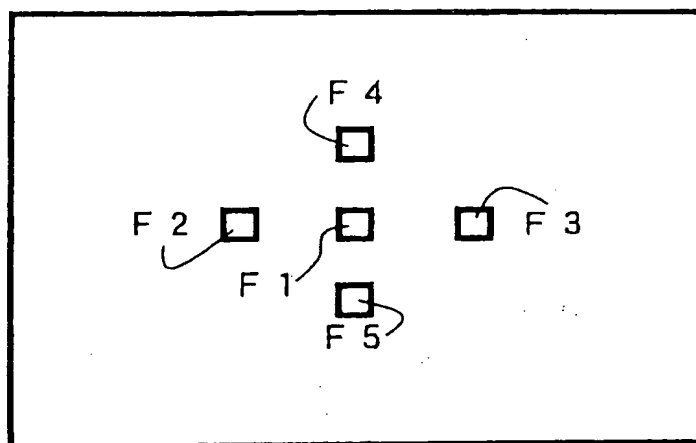

(b)

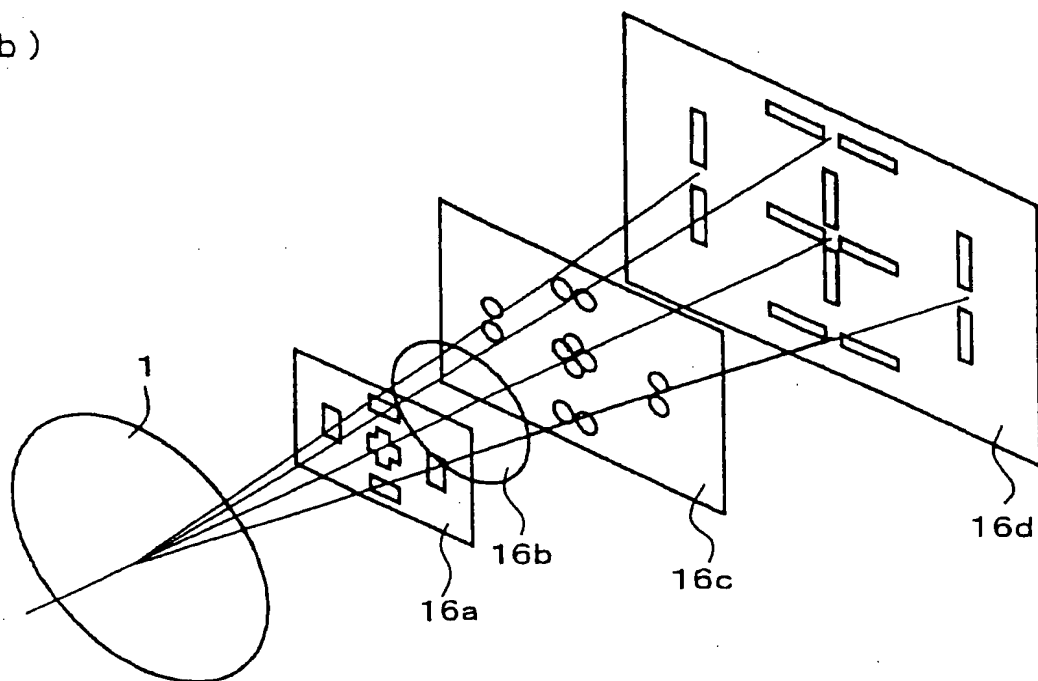


FIG. 4

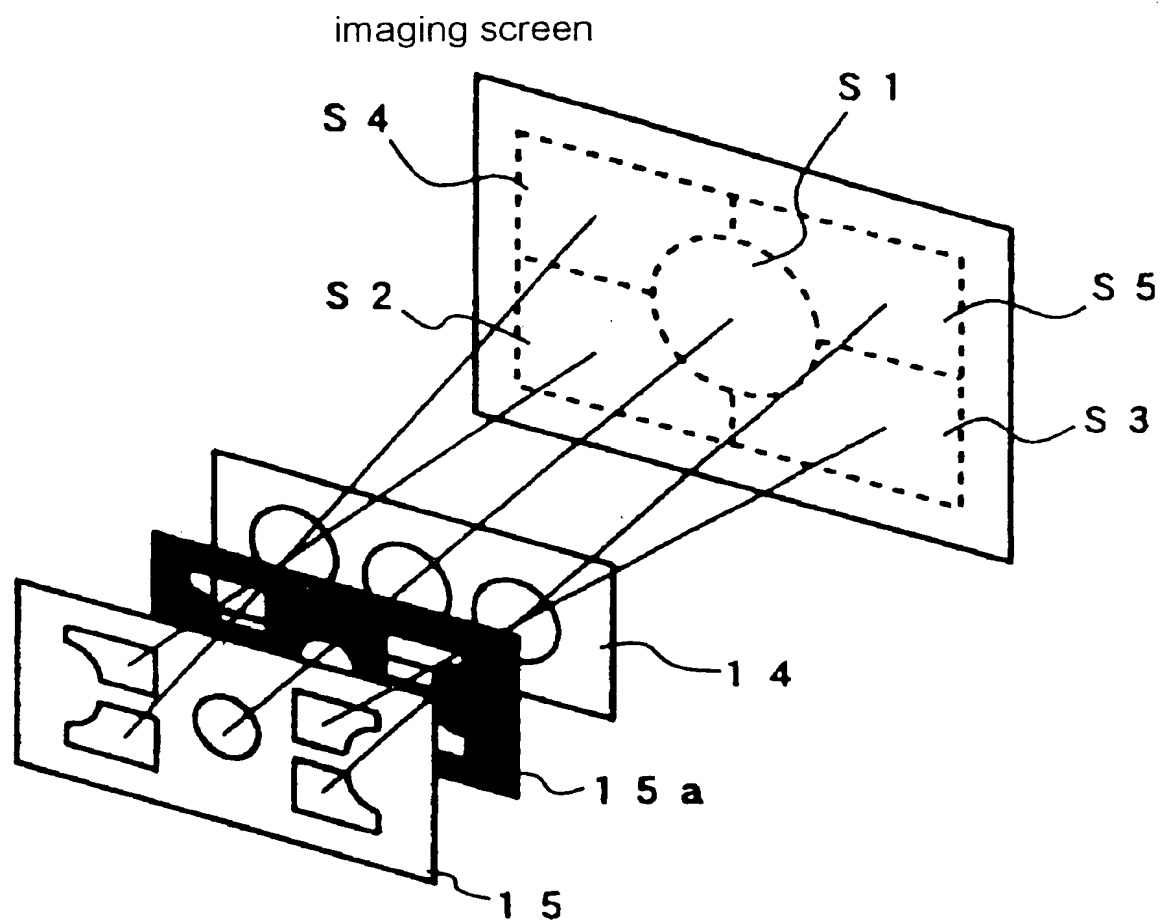


FIG. 5

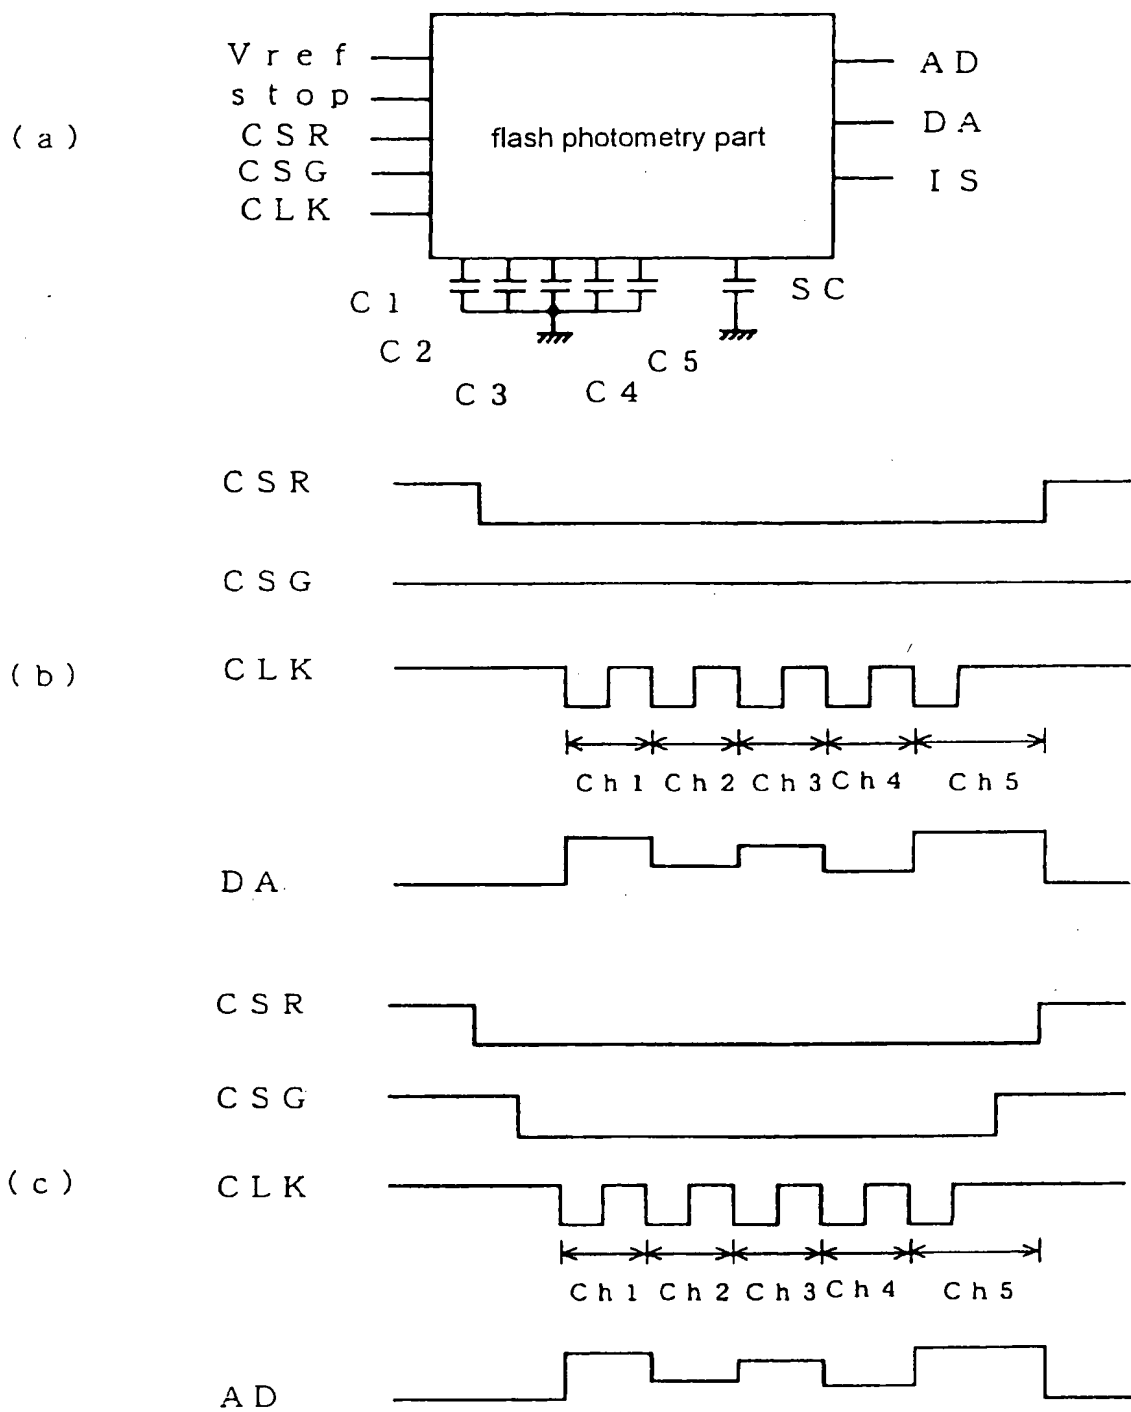


FIG. 6

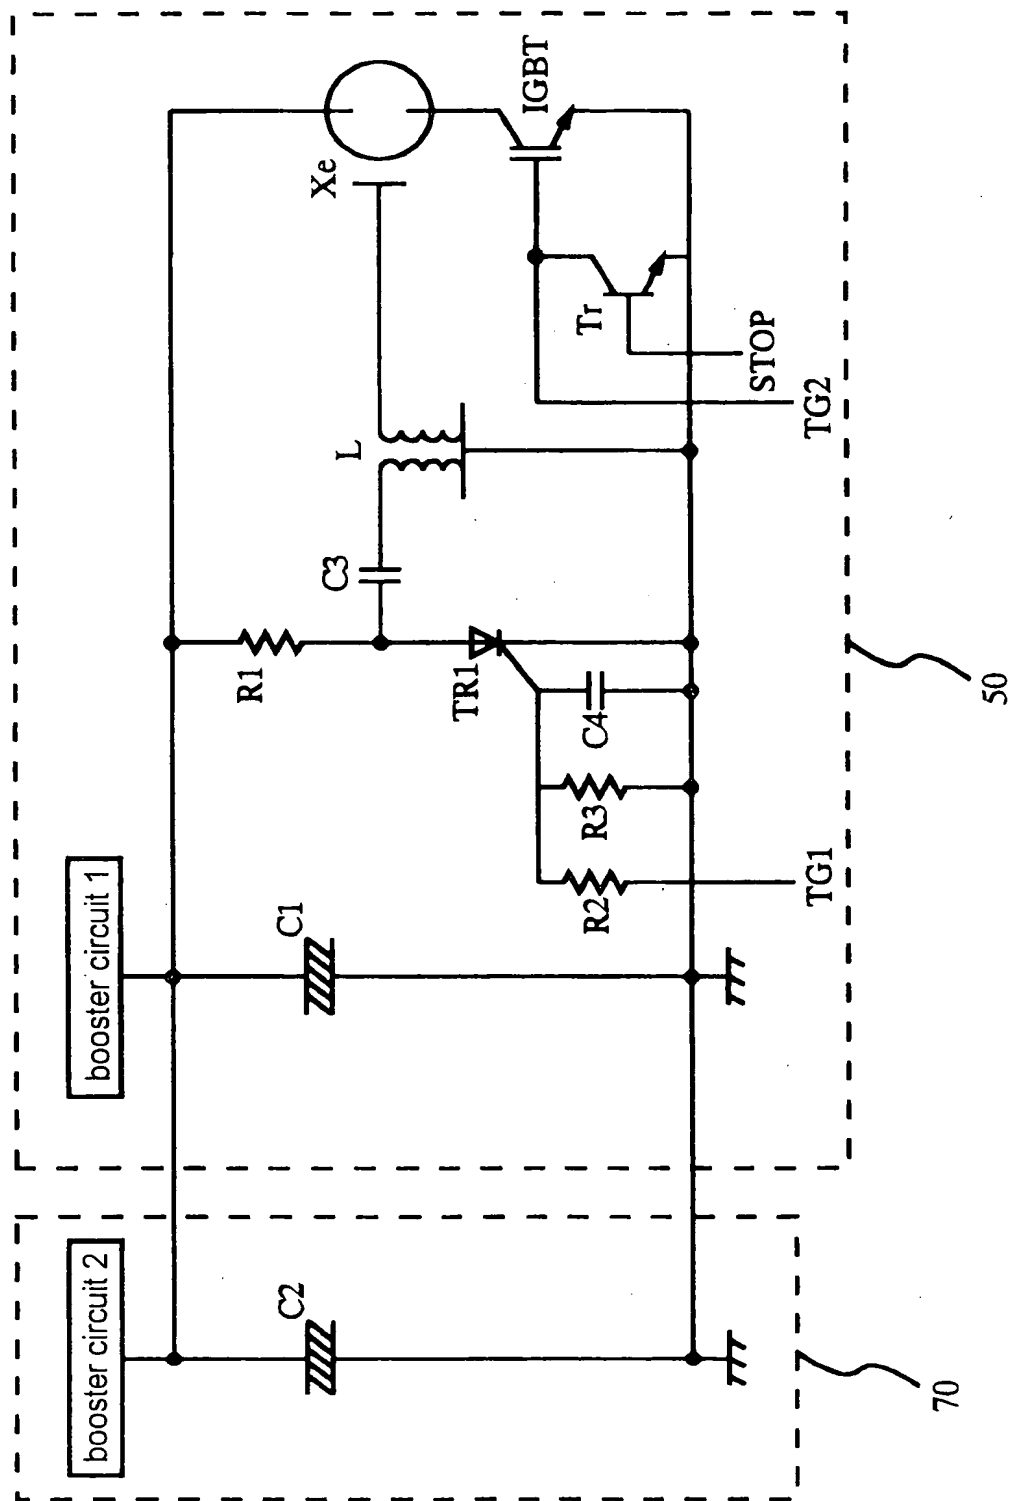


FIG. 7

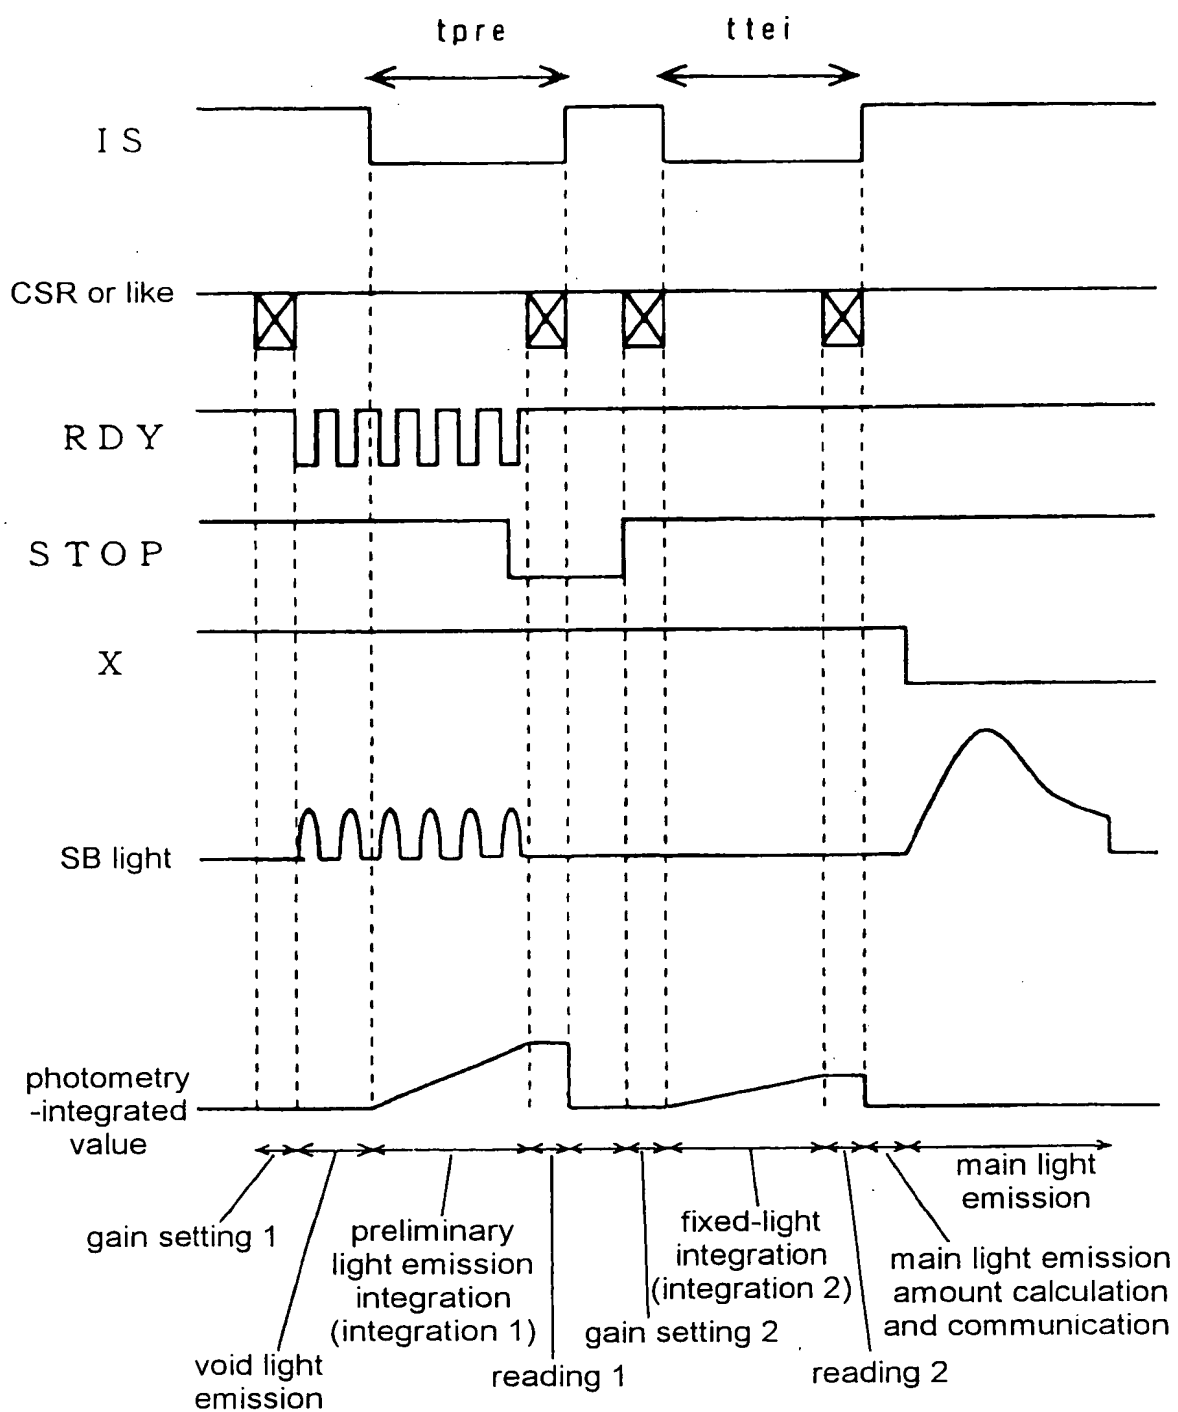


FIG. 8

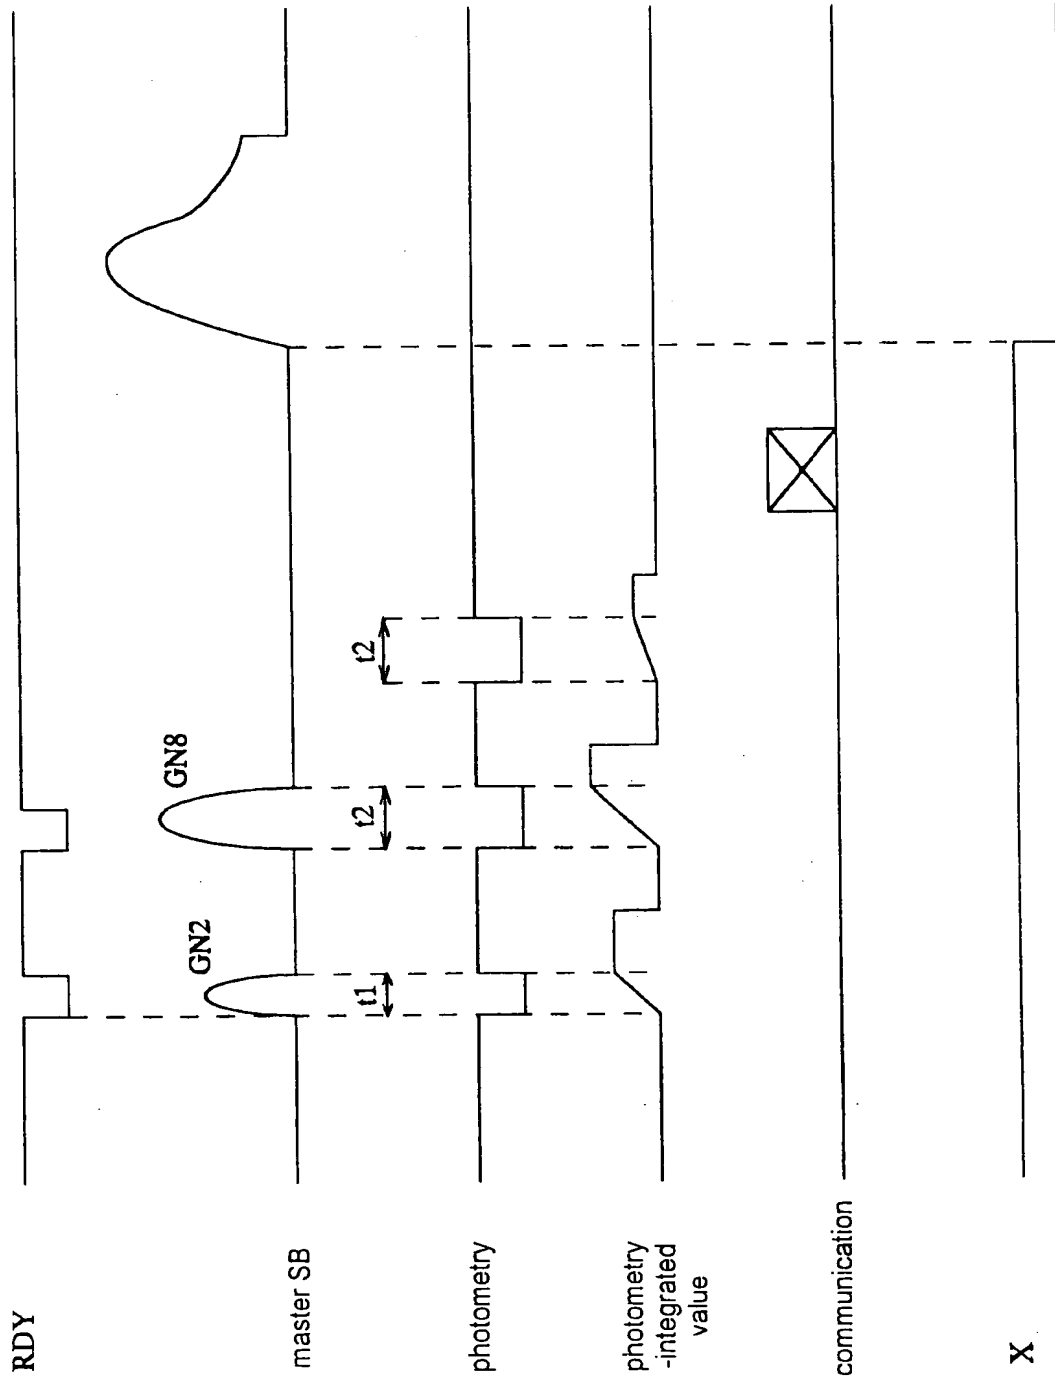


FIG. 9

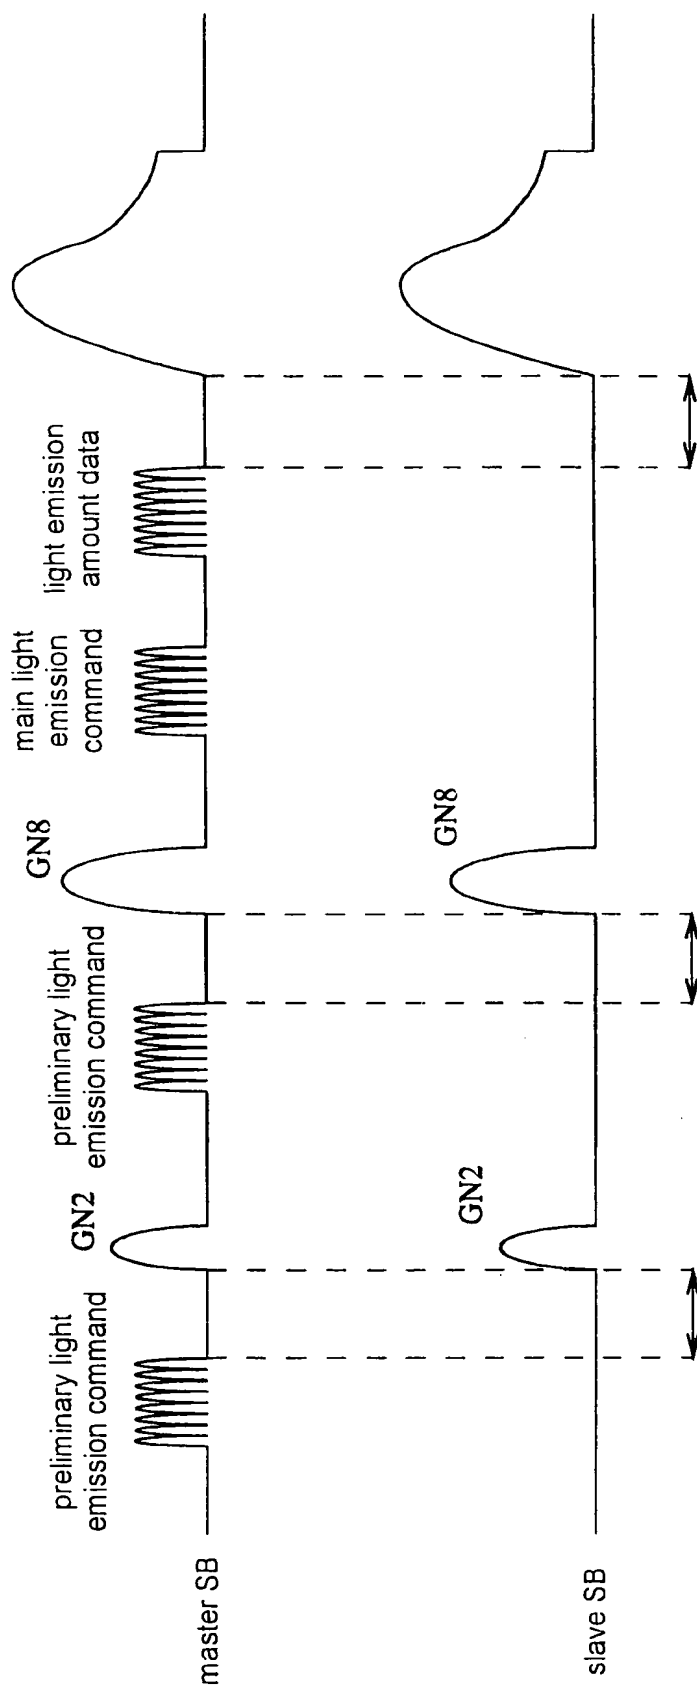


FIG. 10

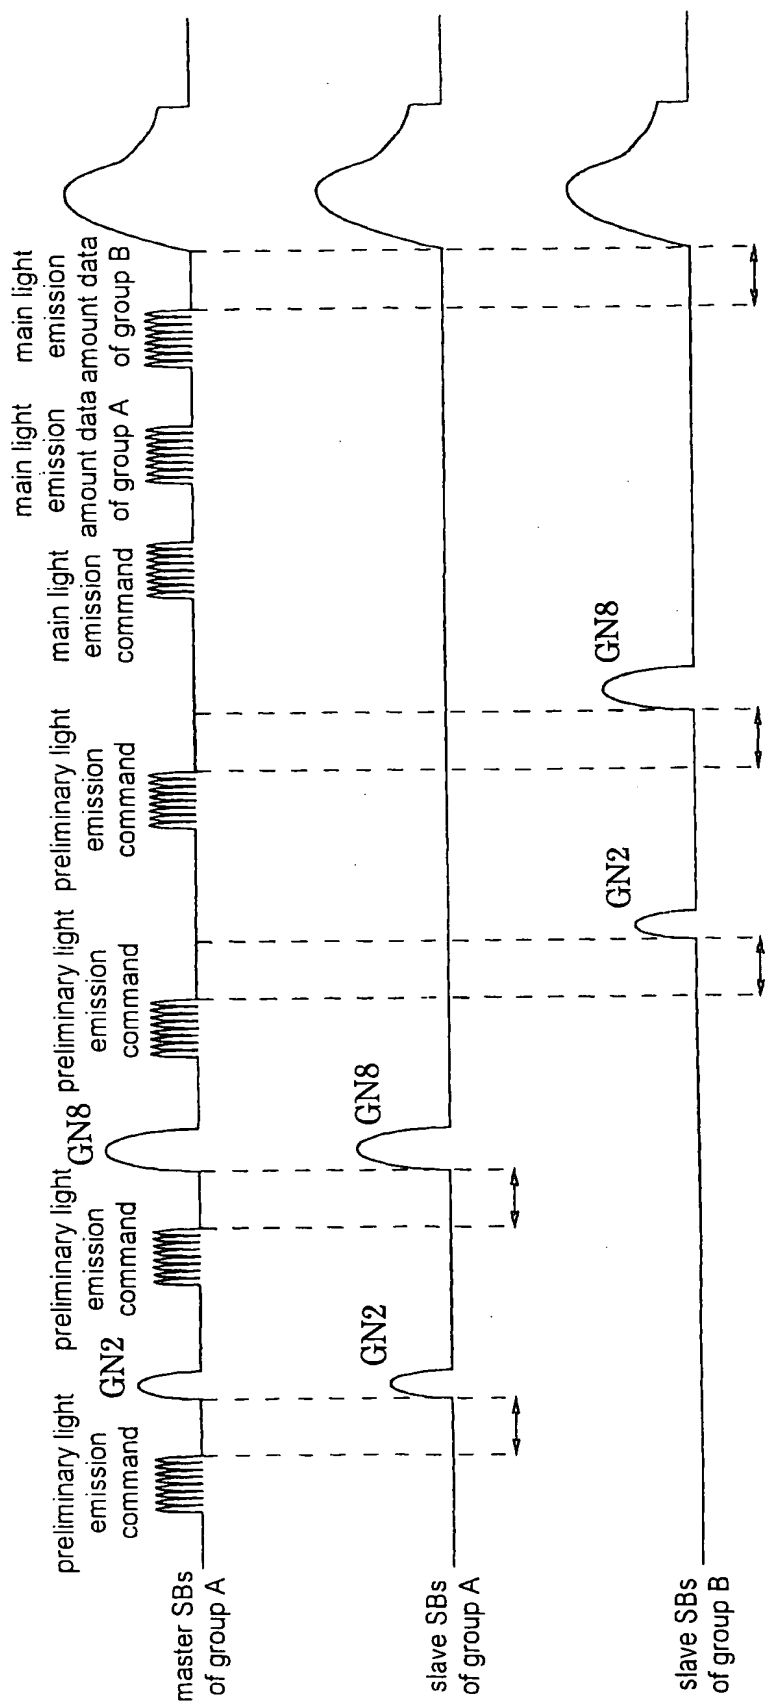


FIG. 11


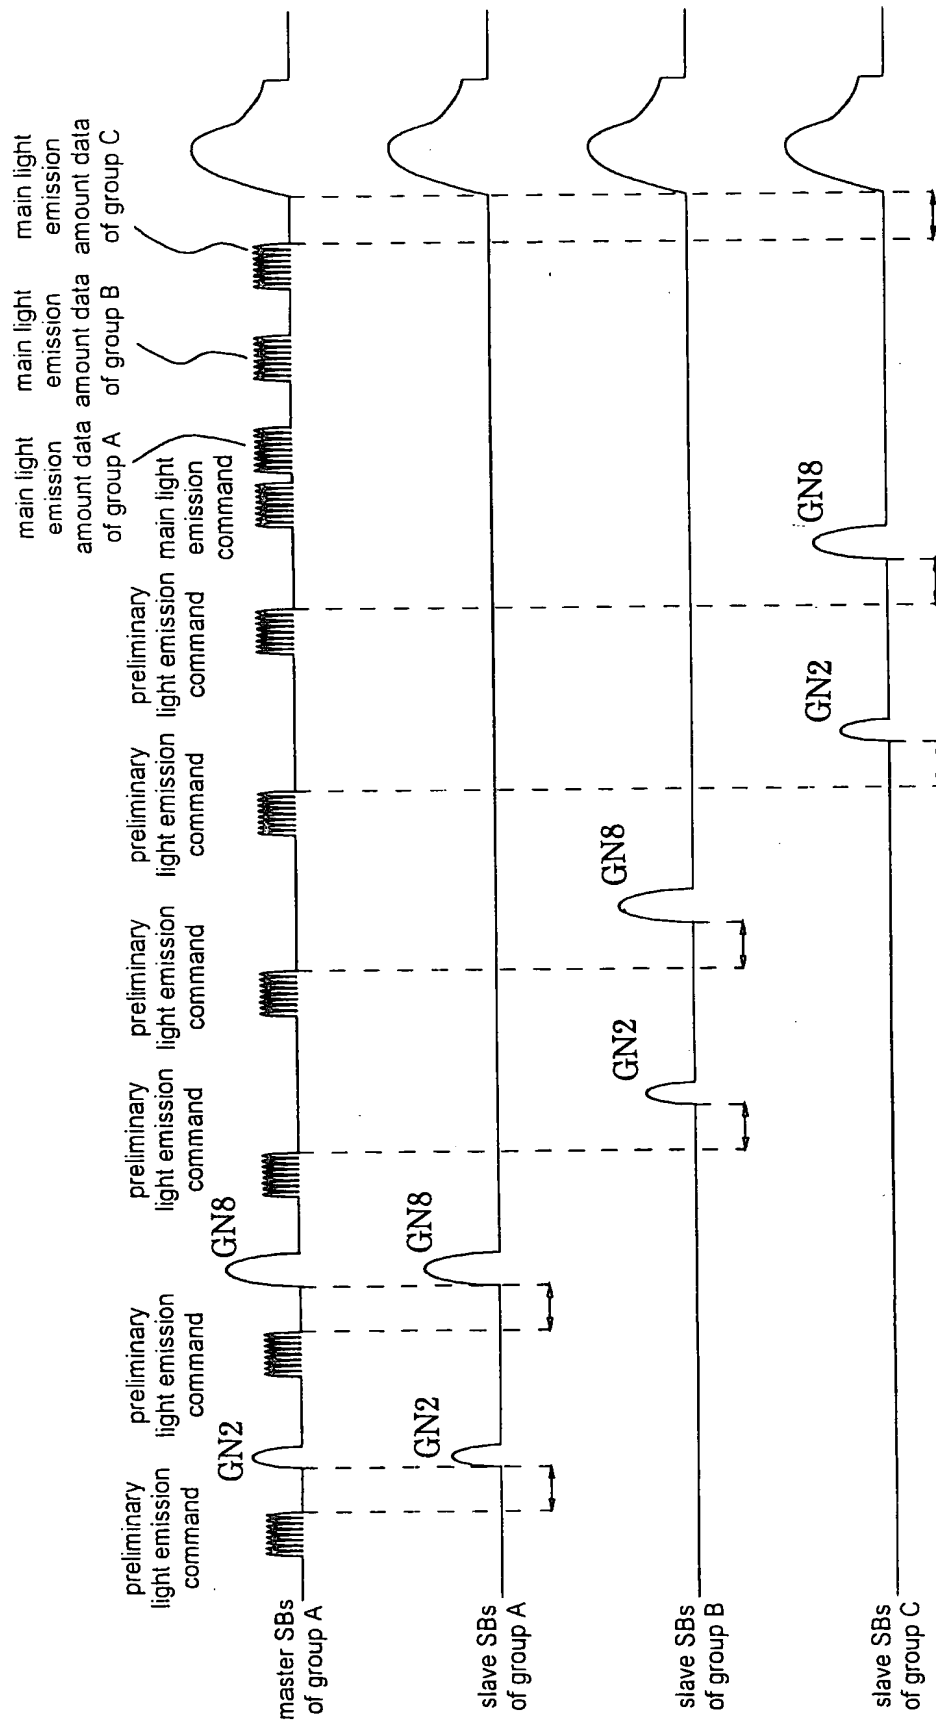


FIG. 12

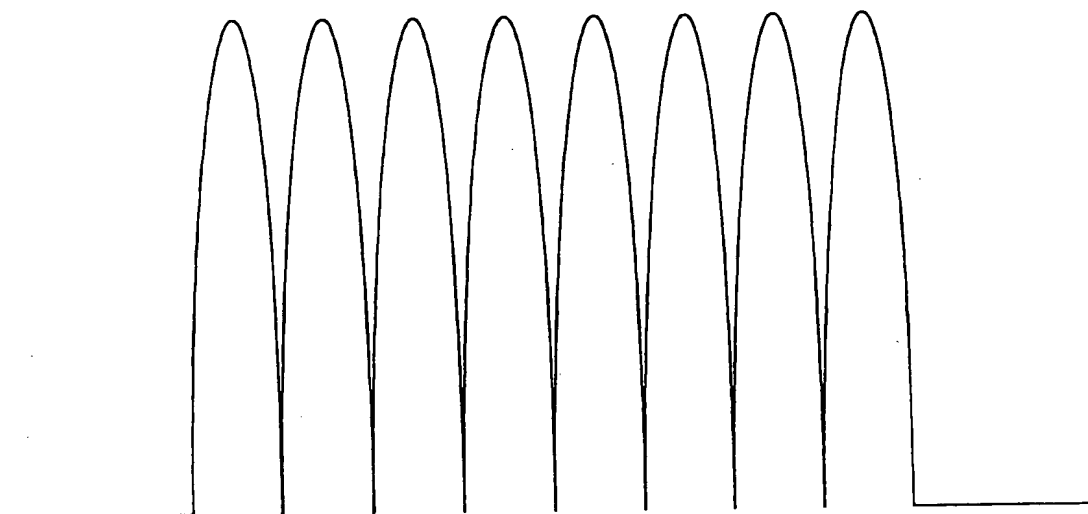

1 fixed GN level group mode CH
designation designation designation designation designation

(KGN)

$\begin{pmatrix} 0 \\ 1 \\ 2 \\ 3 \end{pmatrix}$	$\begin{pmatrix} A \\ B \\ C \\ ALL \end{pmatrix}$	$\begin{pmatrix} \text{main light} \\ \text{emission} \\ \text{preliminary} \\ \text{light} \\ \text{emission} \end{pmatrix}$	$\begin{pmatrix} 0 \\ 1 \\ 2 \\ 3 \end{pmatrix}$
--	--	---	--

FIG. 13

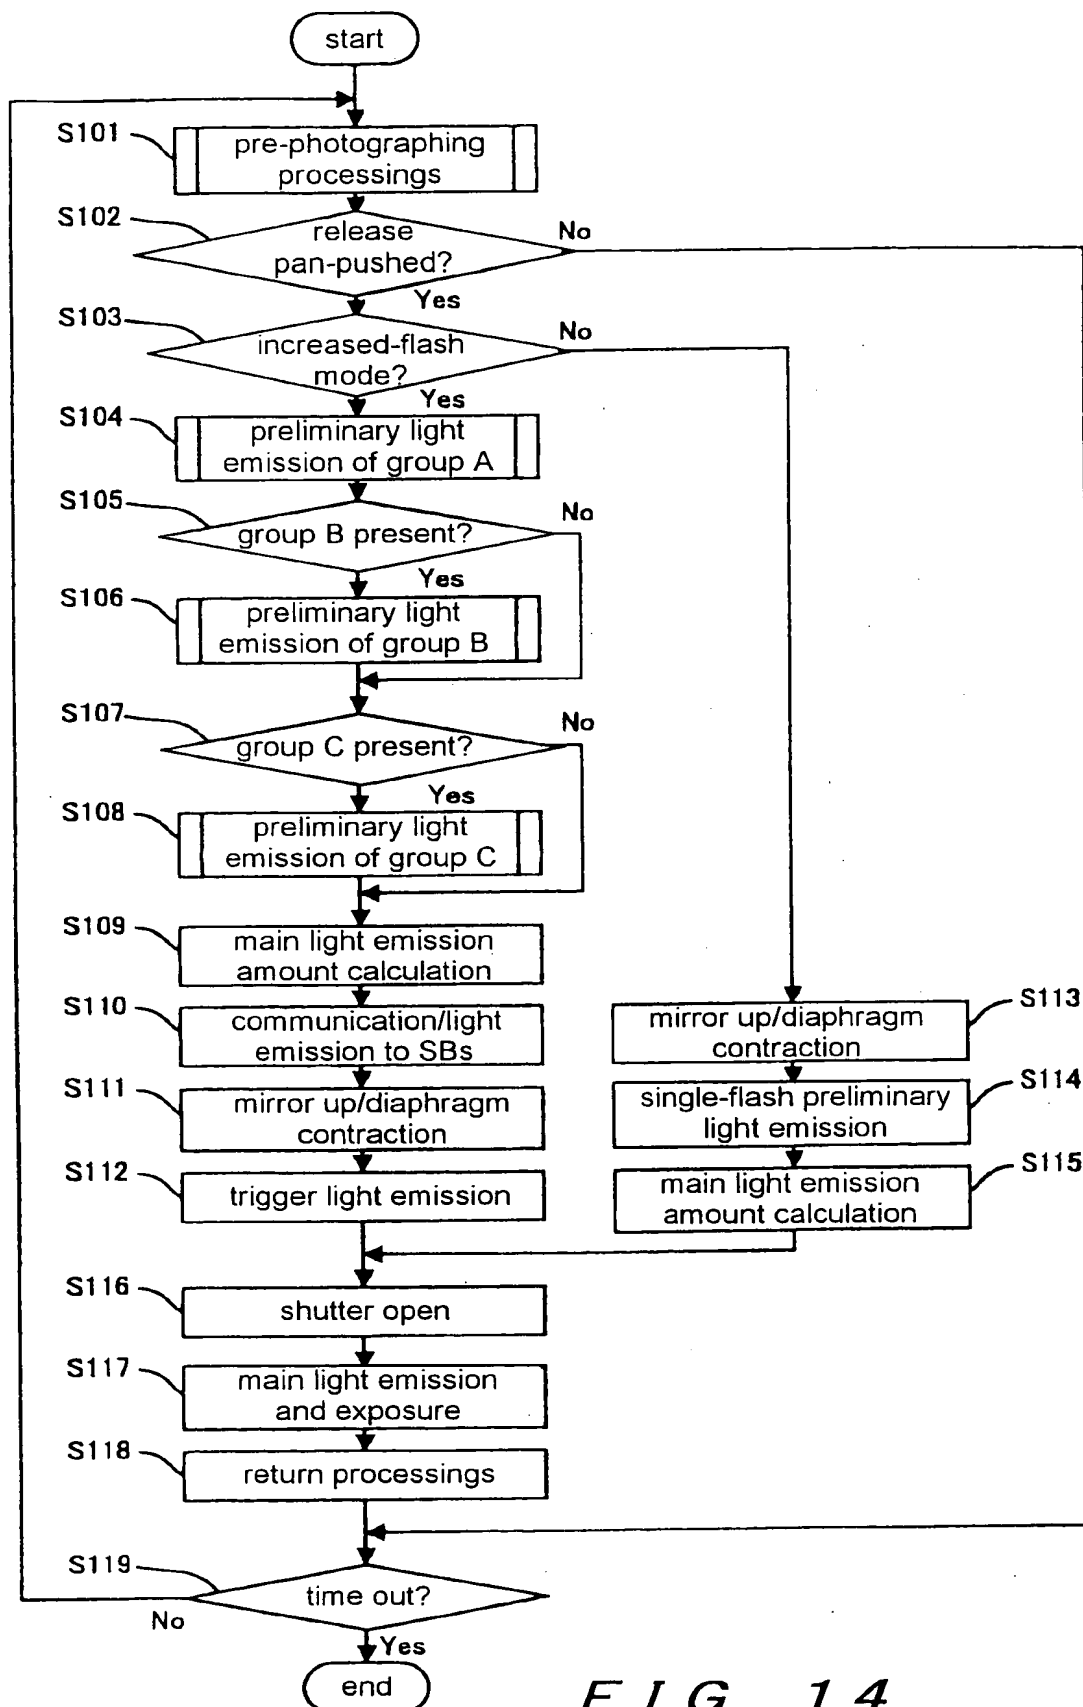


FIG. 14

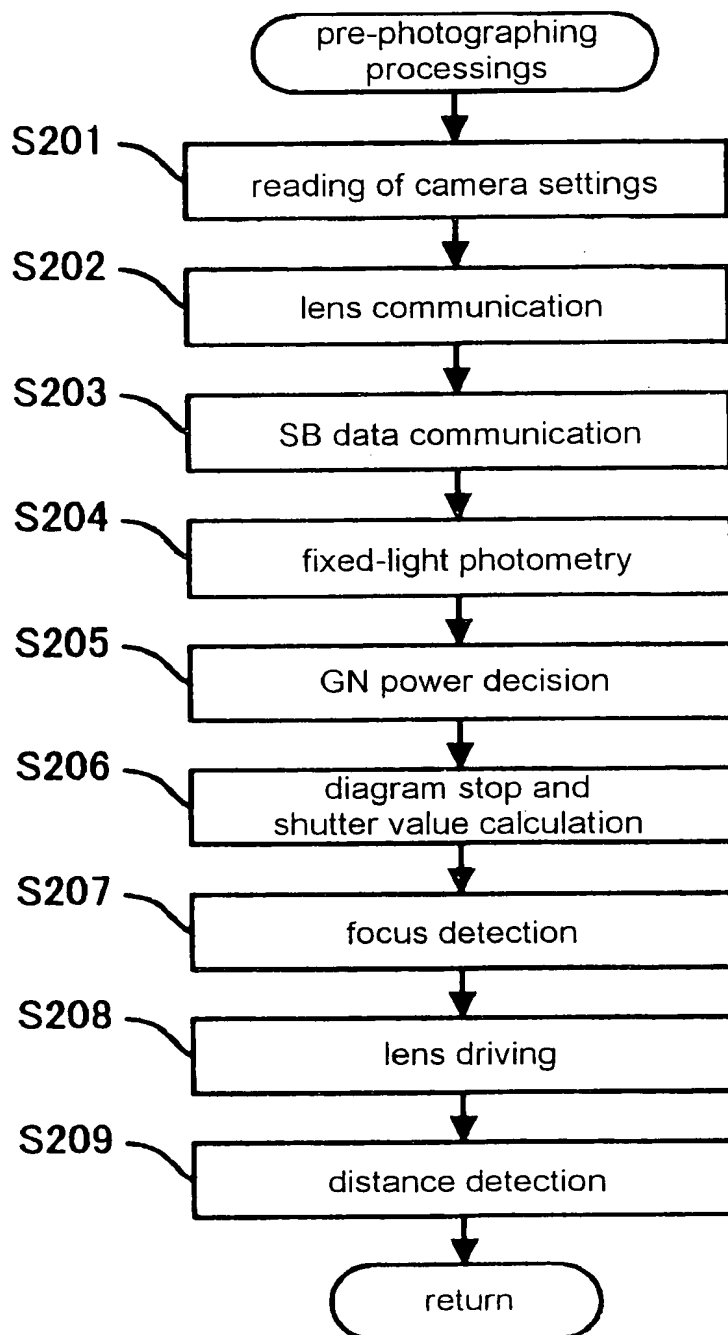


FIG. 15

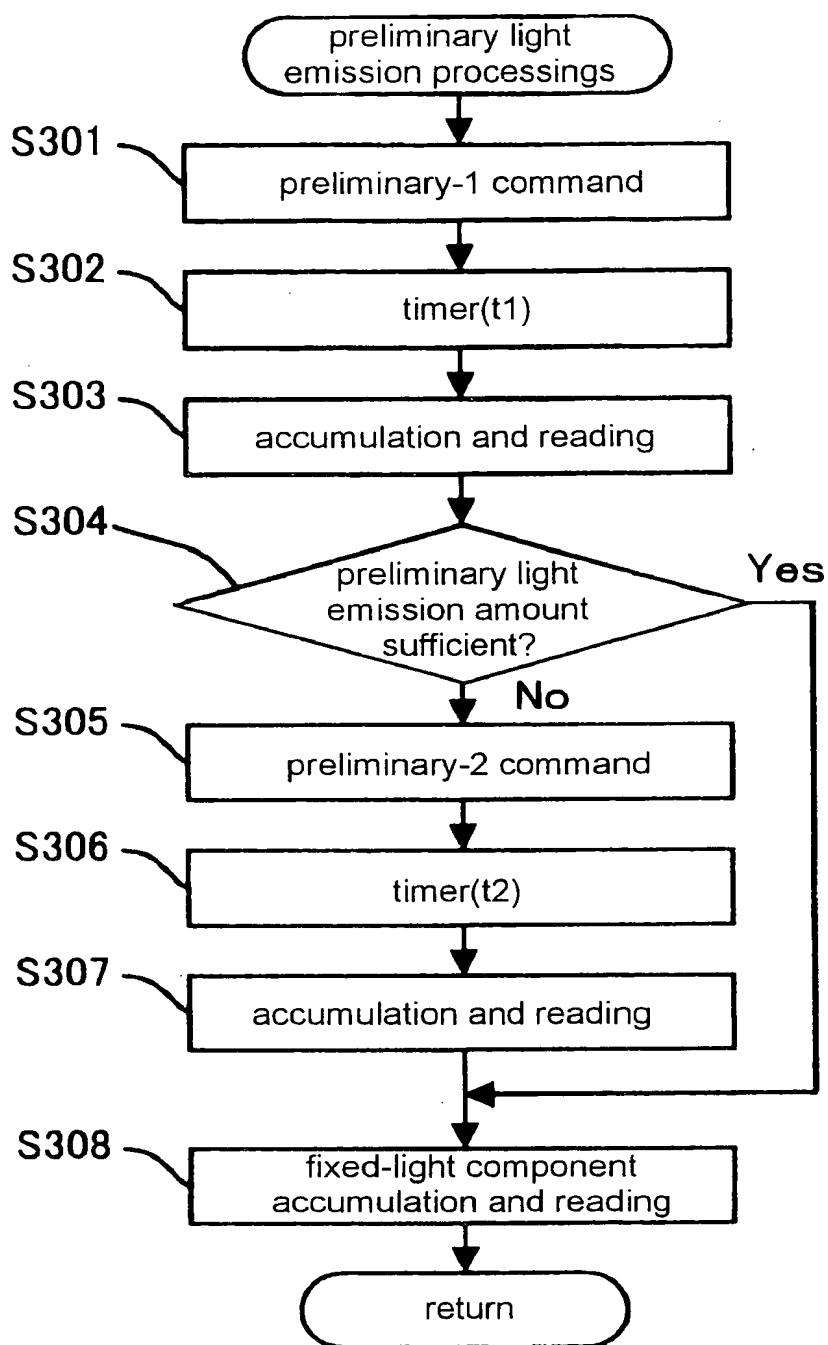


FIG. 16

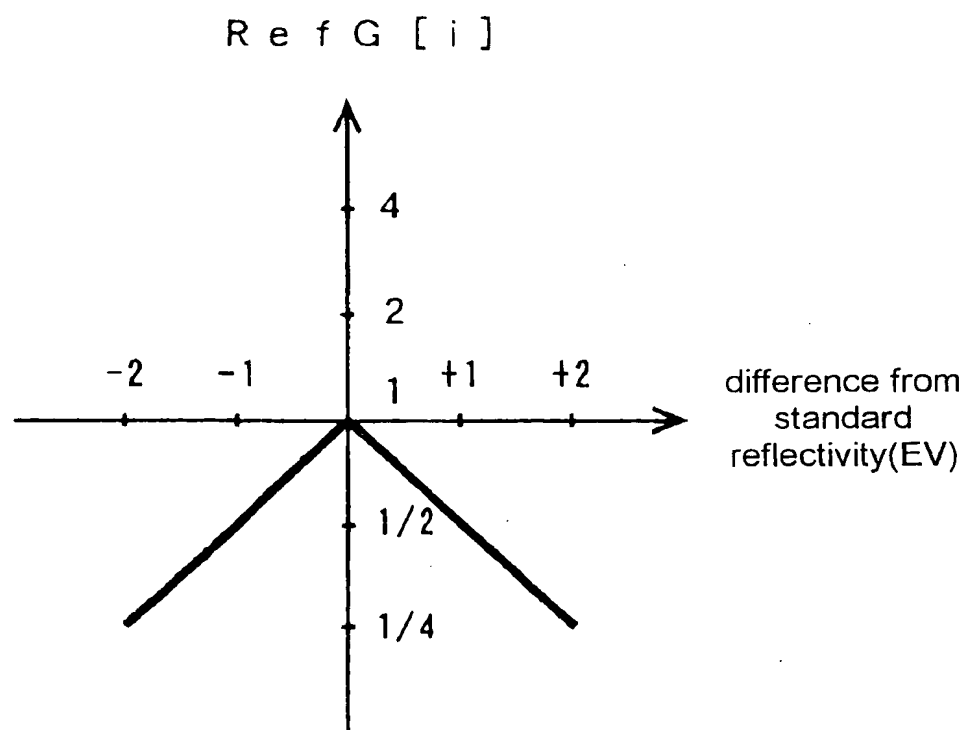


FIG. 17

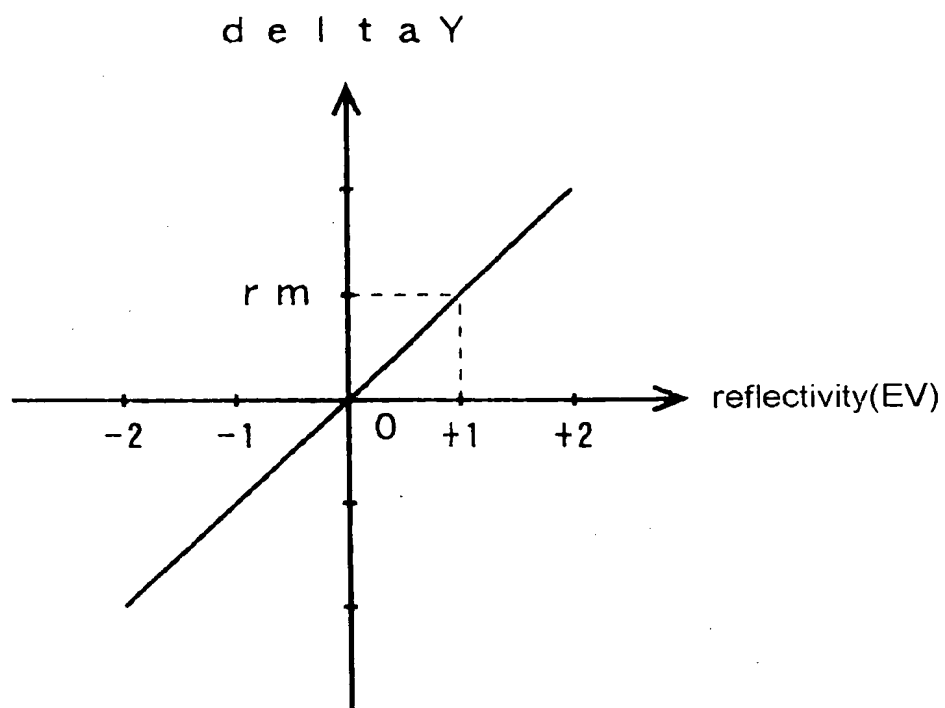


FIG. 18

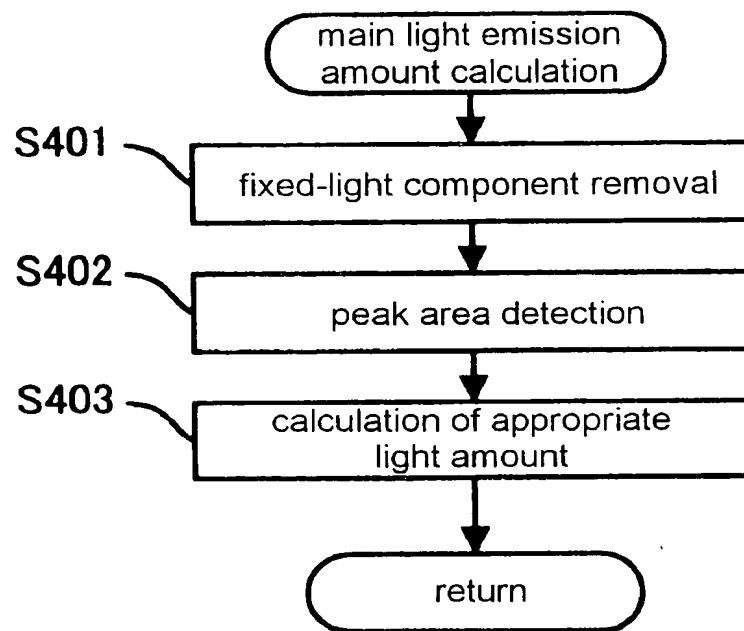


FIG. 19

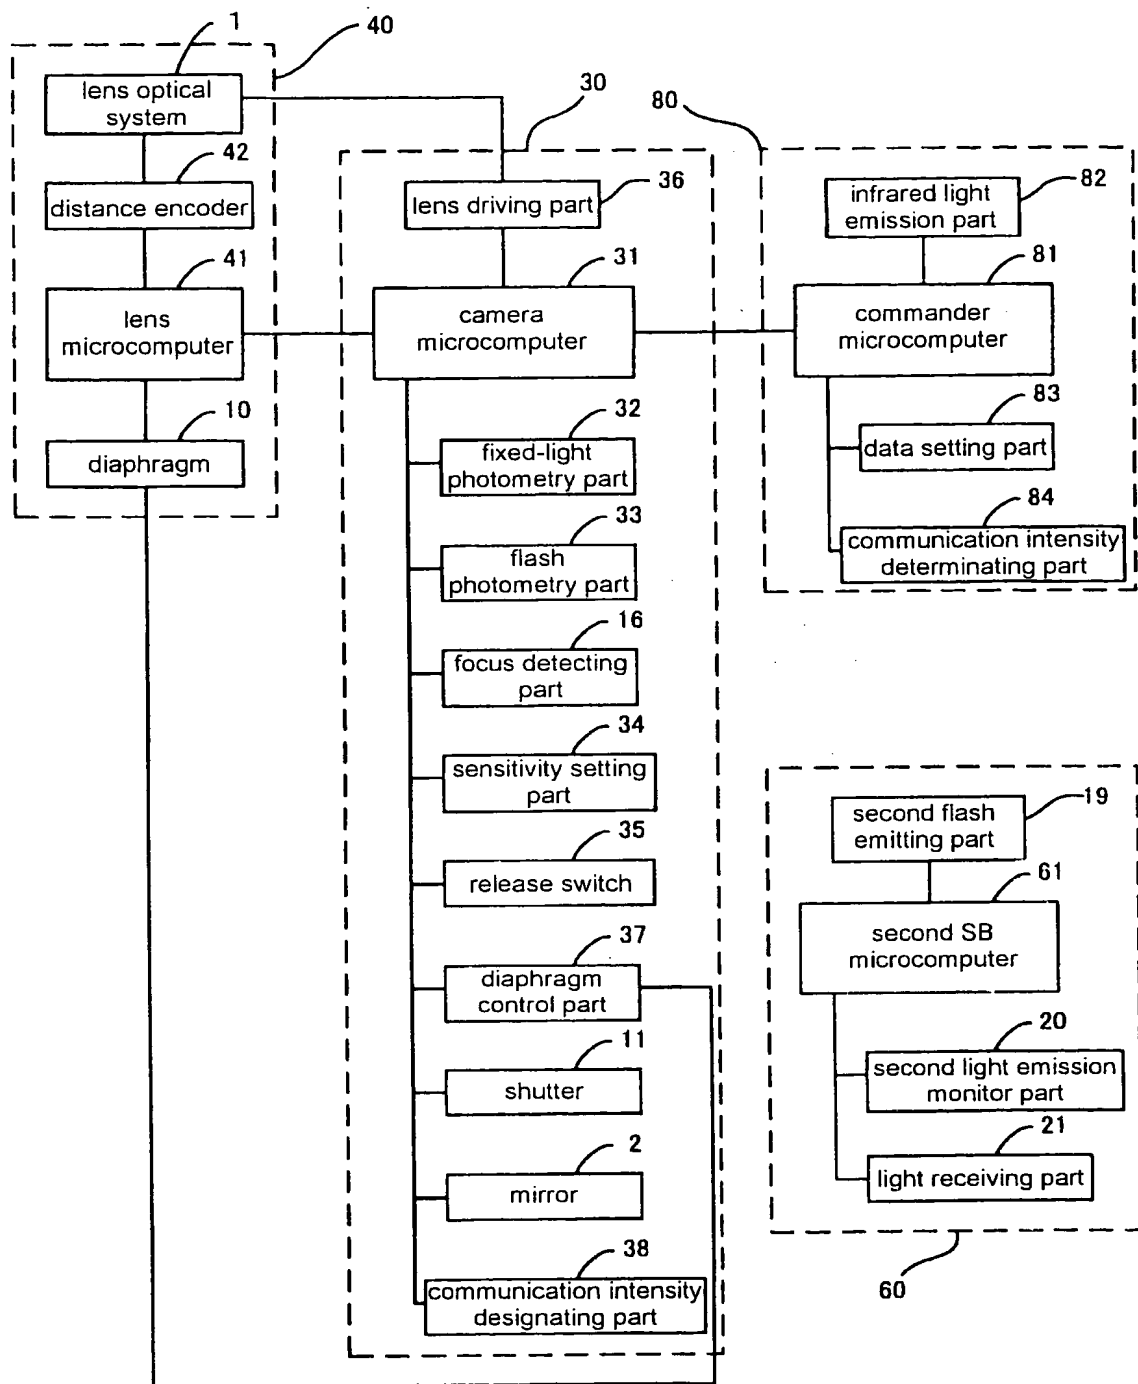


FIG. 20

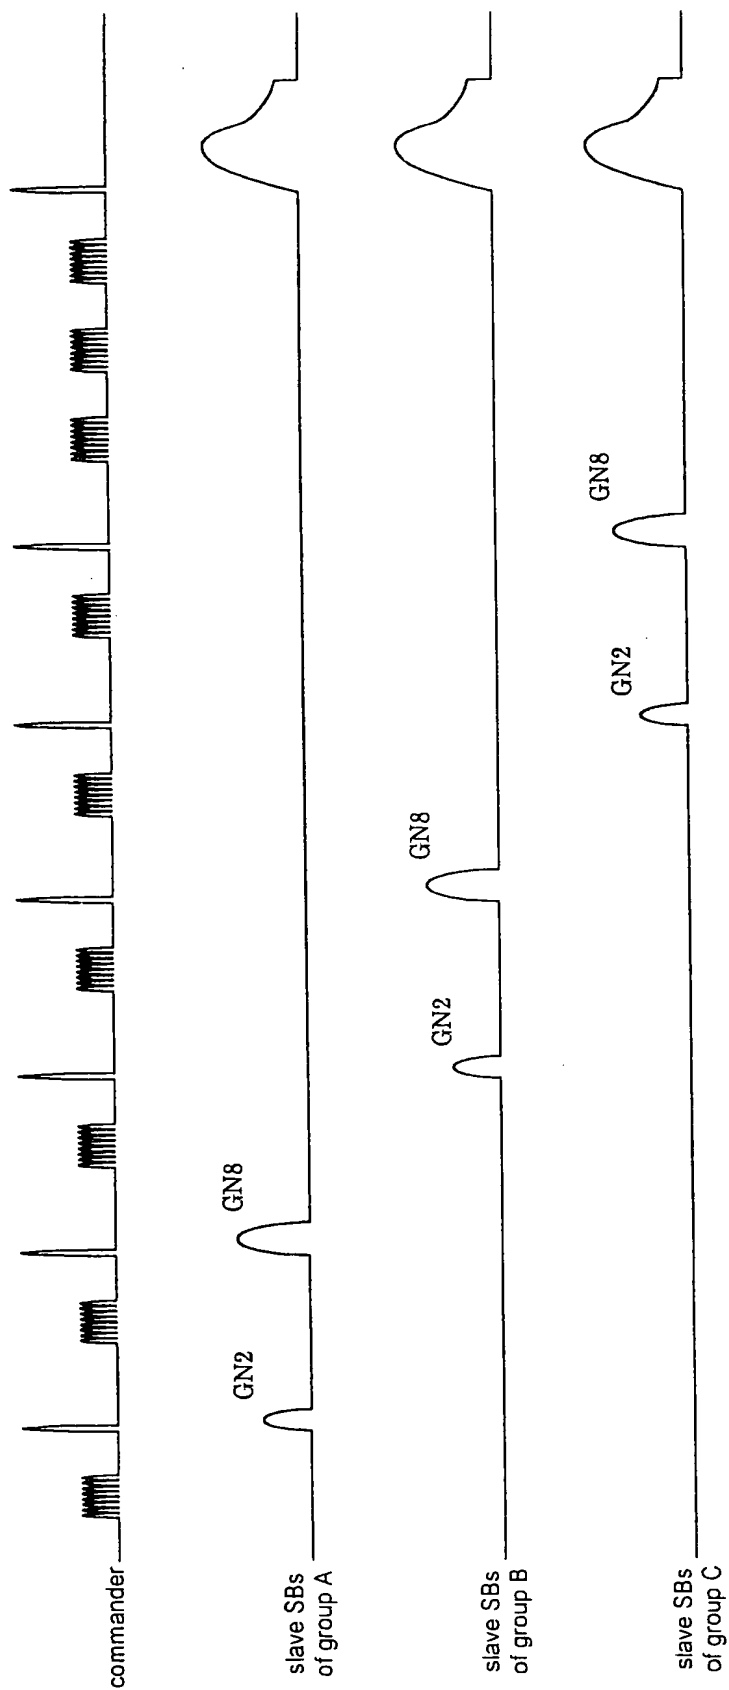


FIG. 21

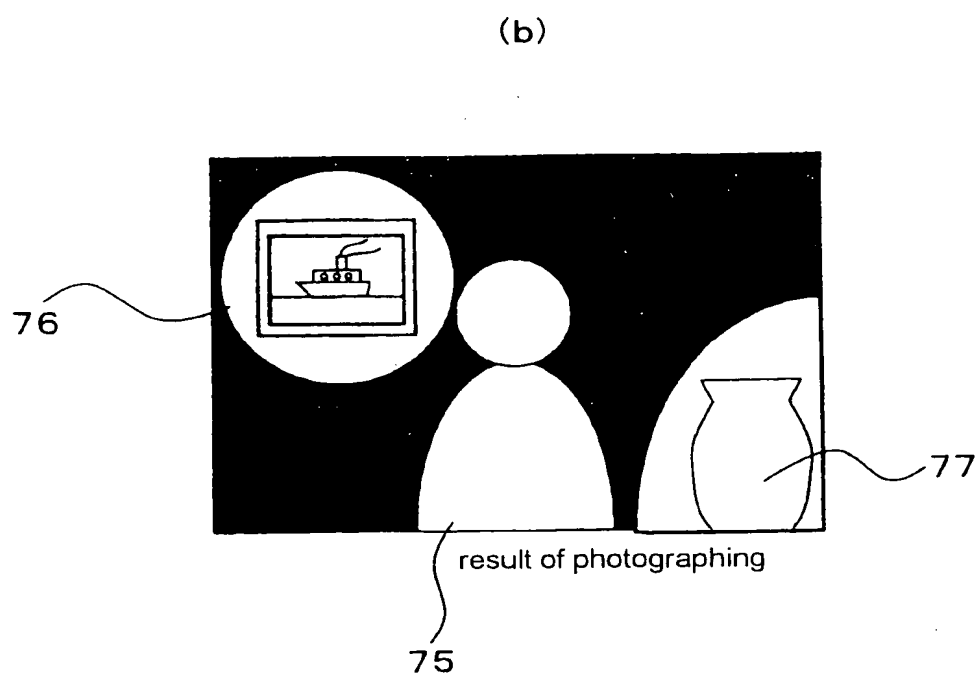
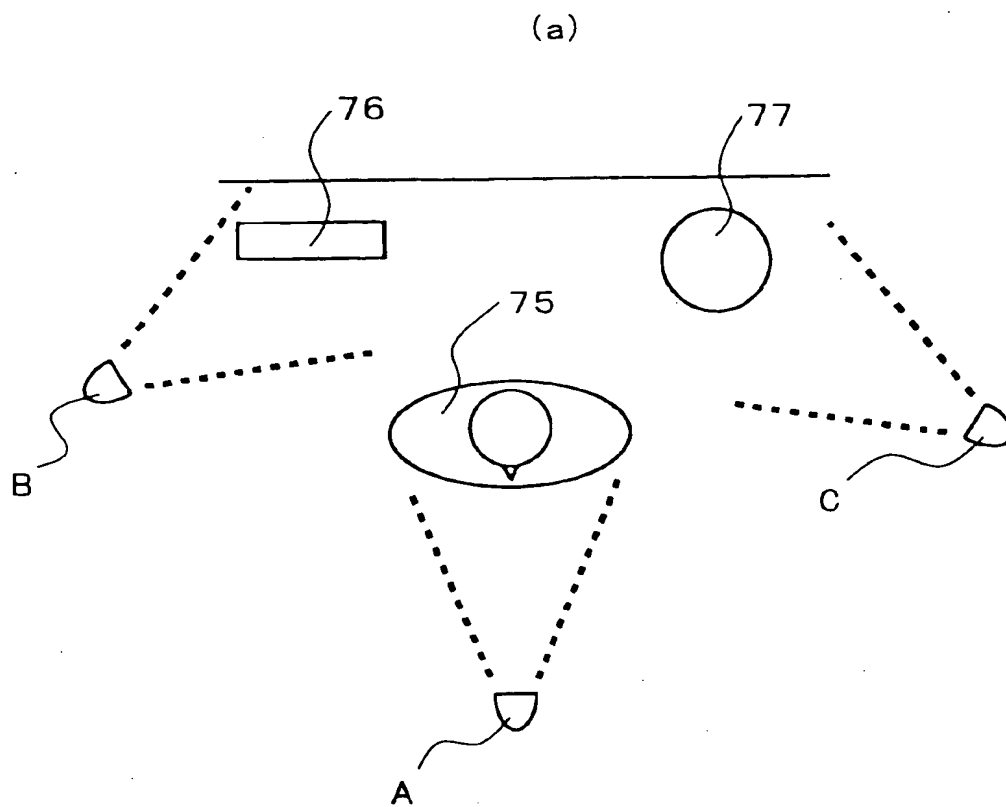


FIG. 22

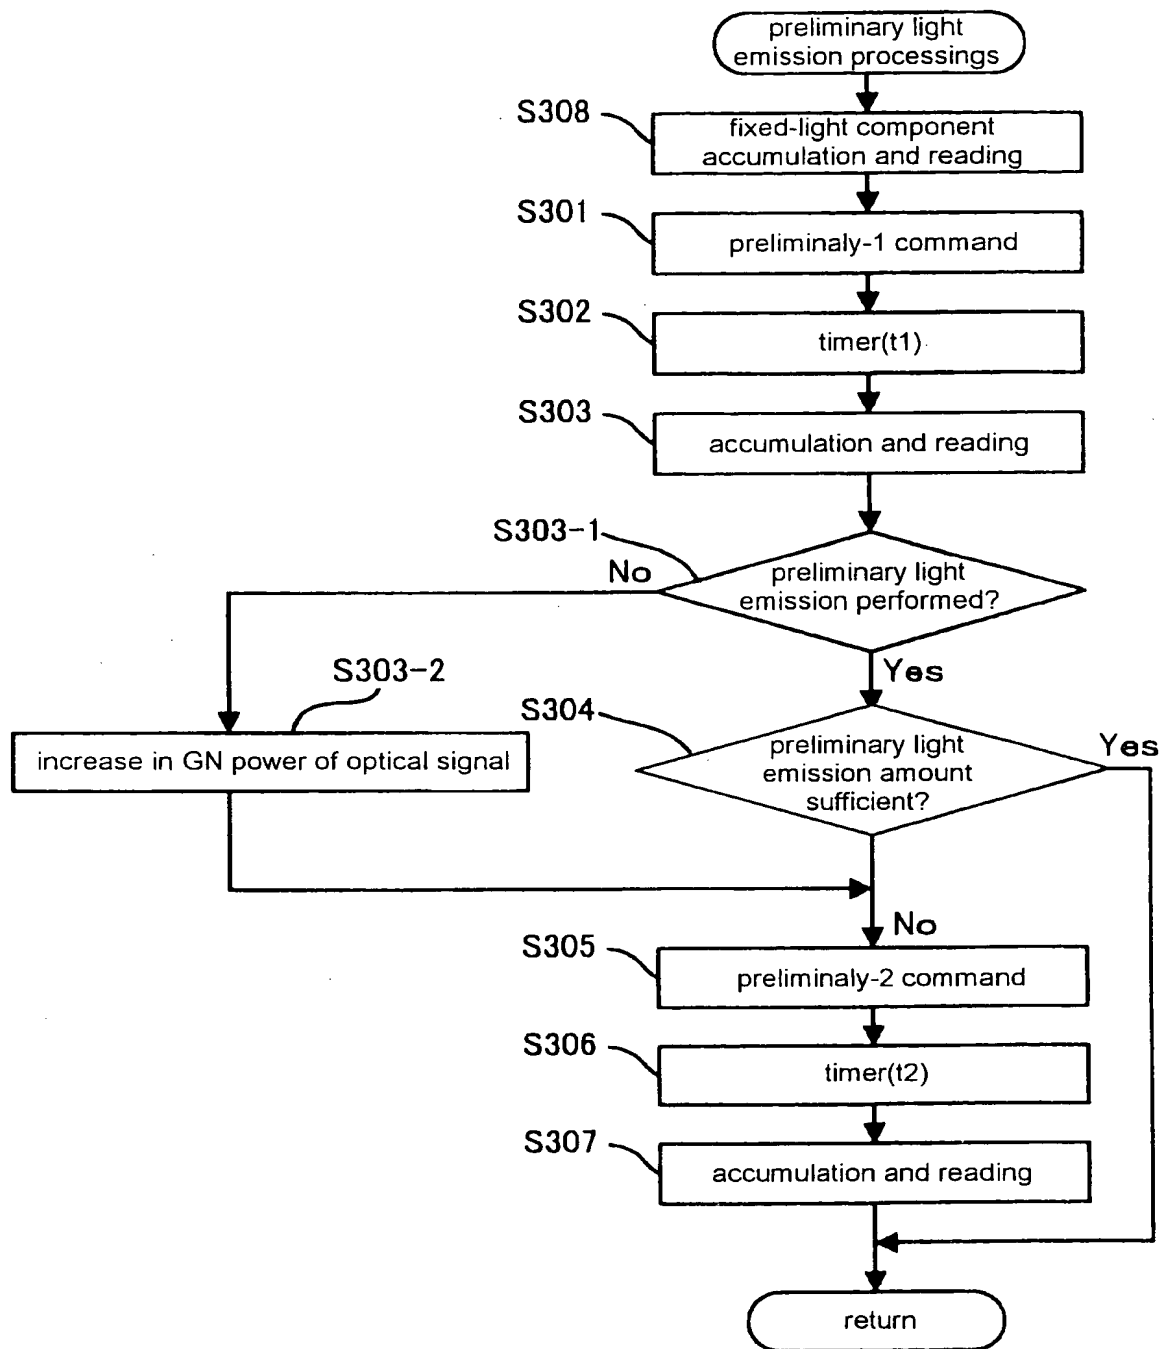


FIG. 23

	unit: Guide Number	
	communication intensity increase not designated	communication intensity increase designated
master SB only	0. 7	1. 0
master SB plus power pack	1. 0	1. 4
master SB only (no main master light emission)	1. 0	1. 4
master SB plus power pack (no main master light emission)	1. 4	2. 0
dedicated commander	1. 4	2. 0

FIG. 24


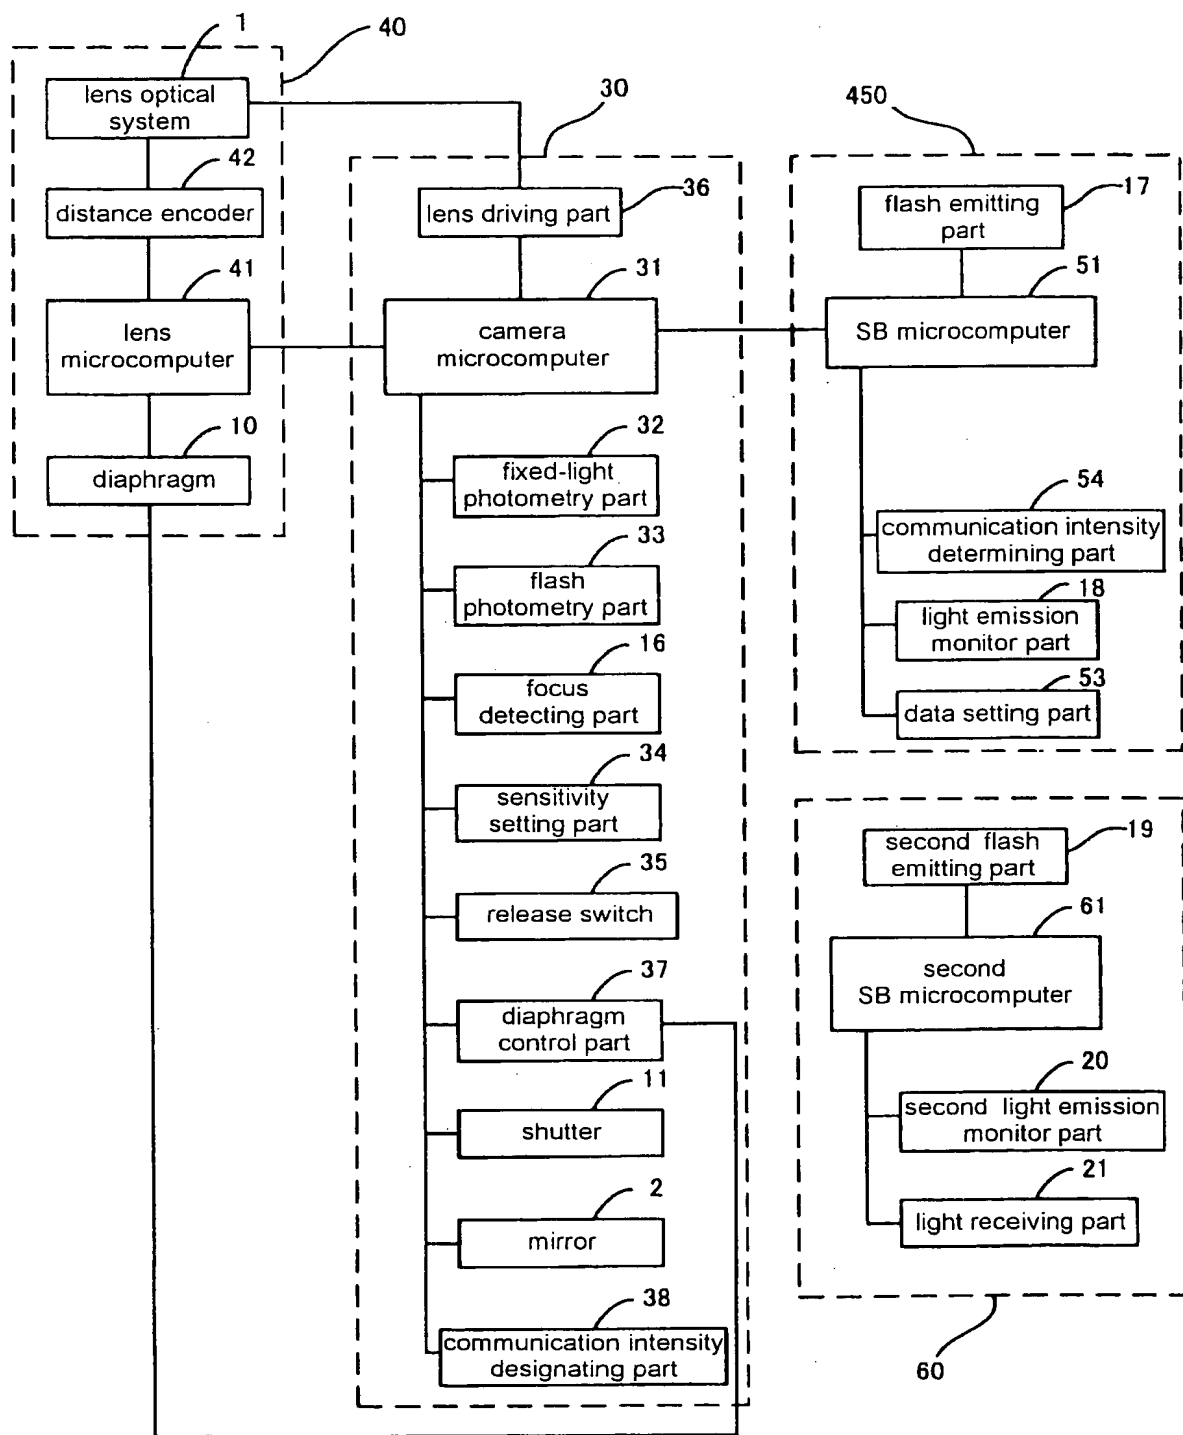


FIG. 25

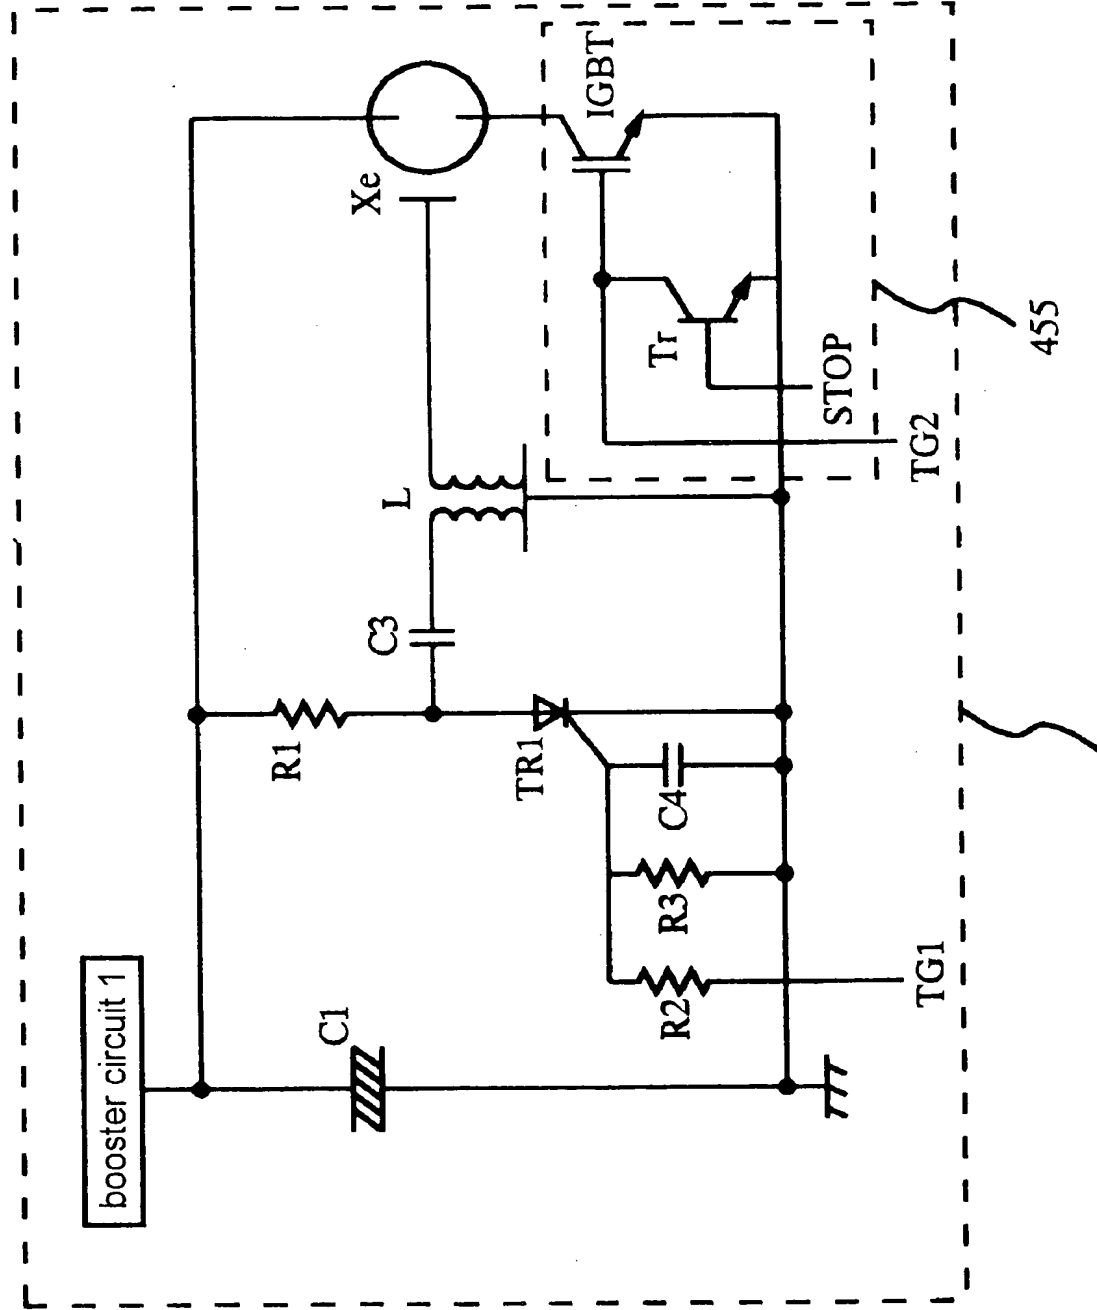

450 FIG. 26

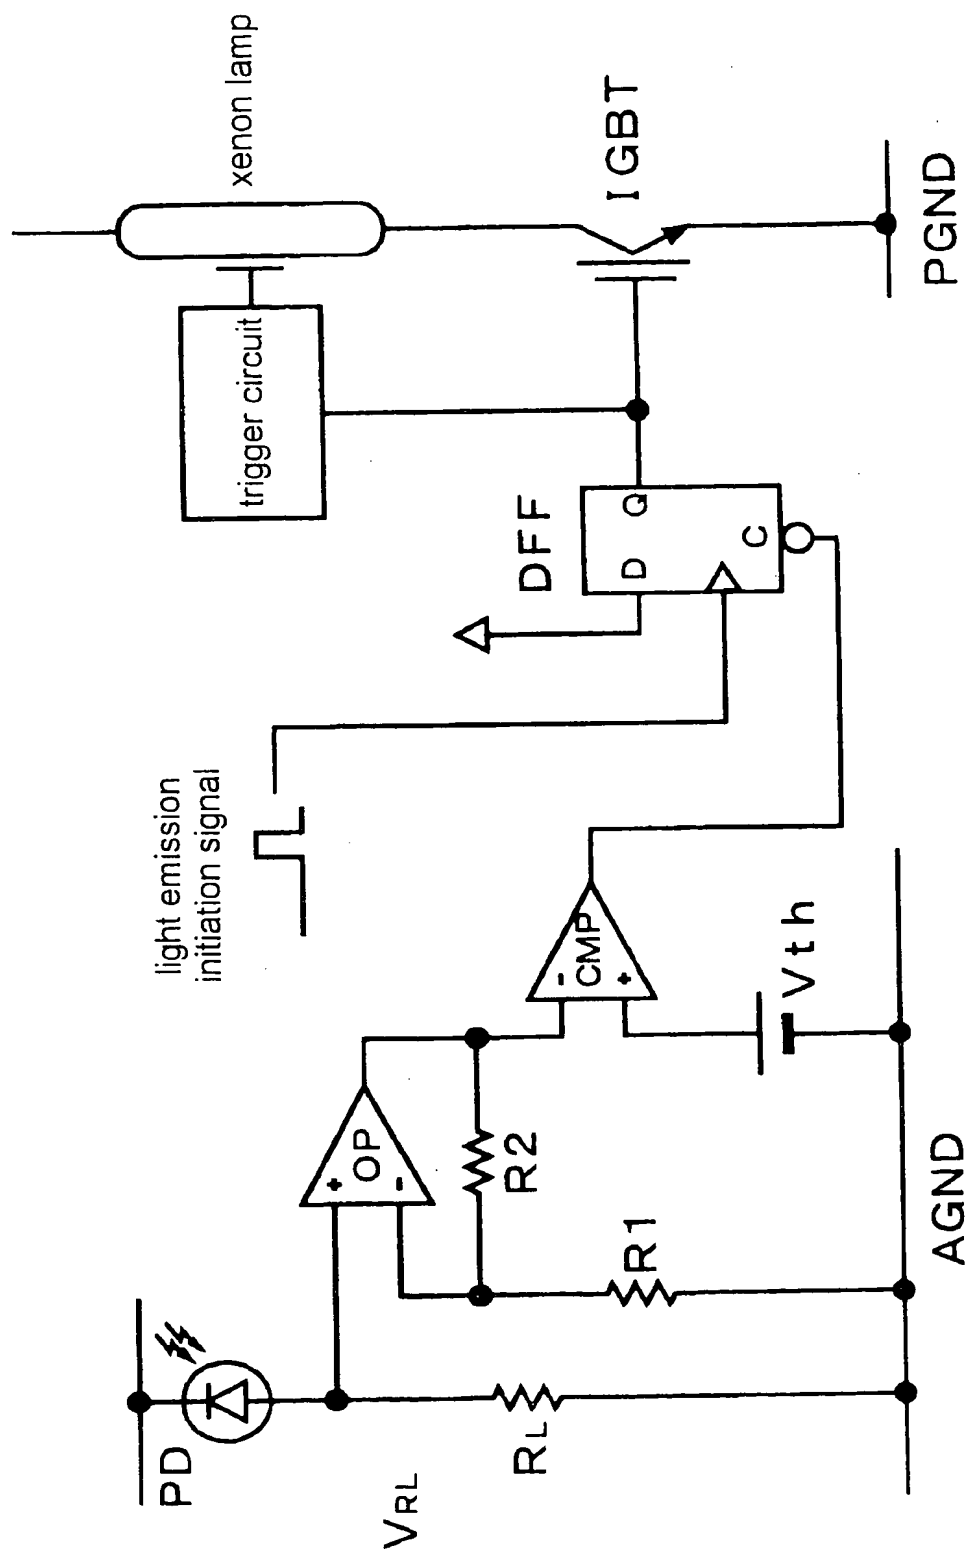


FIG. 27

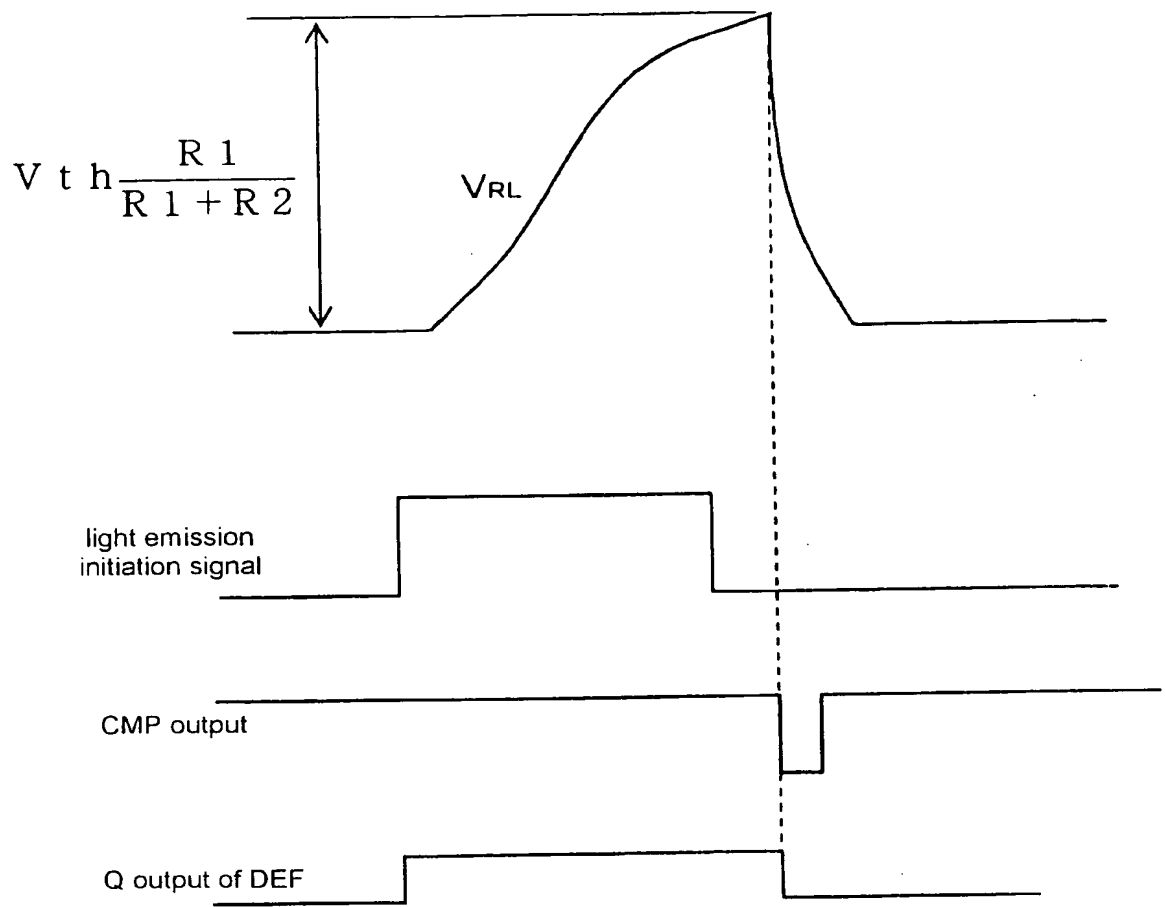


FIG. 28

- (a) normal wireless multi-flash
photographing on screen display

WIRELESS MODE

MASTER	TTL	+1
SLAVE-A	TTL	± 0
SLAVE-B	TTL	+0.5
SLAVE-C	MAN	GN30

- (b) commander mode for wireless
multi-flash photographing

WIRELESS MODE

MASTER	---	
SLAVE-A	TTL	± 0
SLAVE-B	TTL	+0.5
SLAVE-C	MAN	GN20

FIG. 29

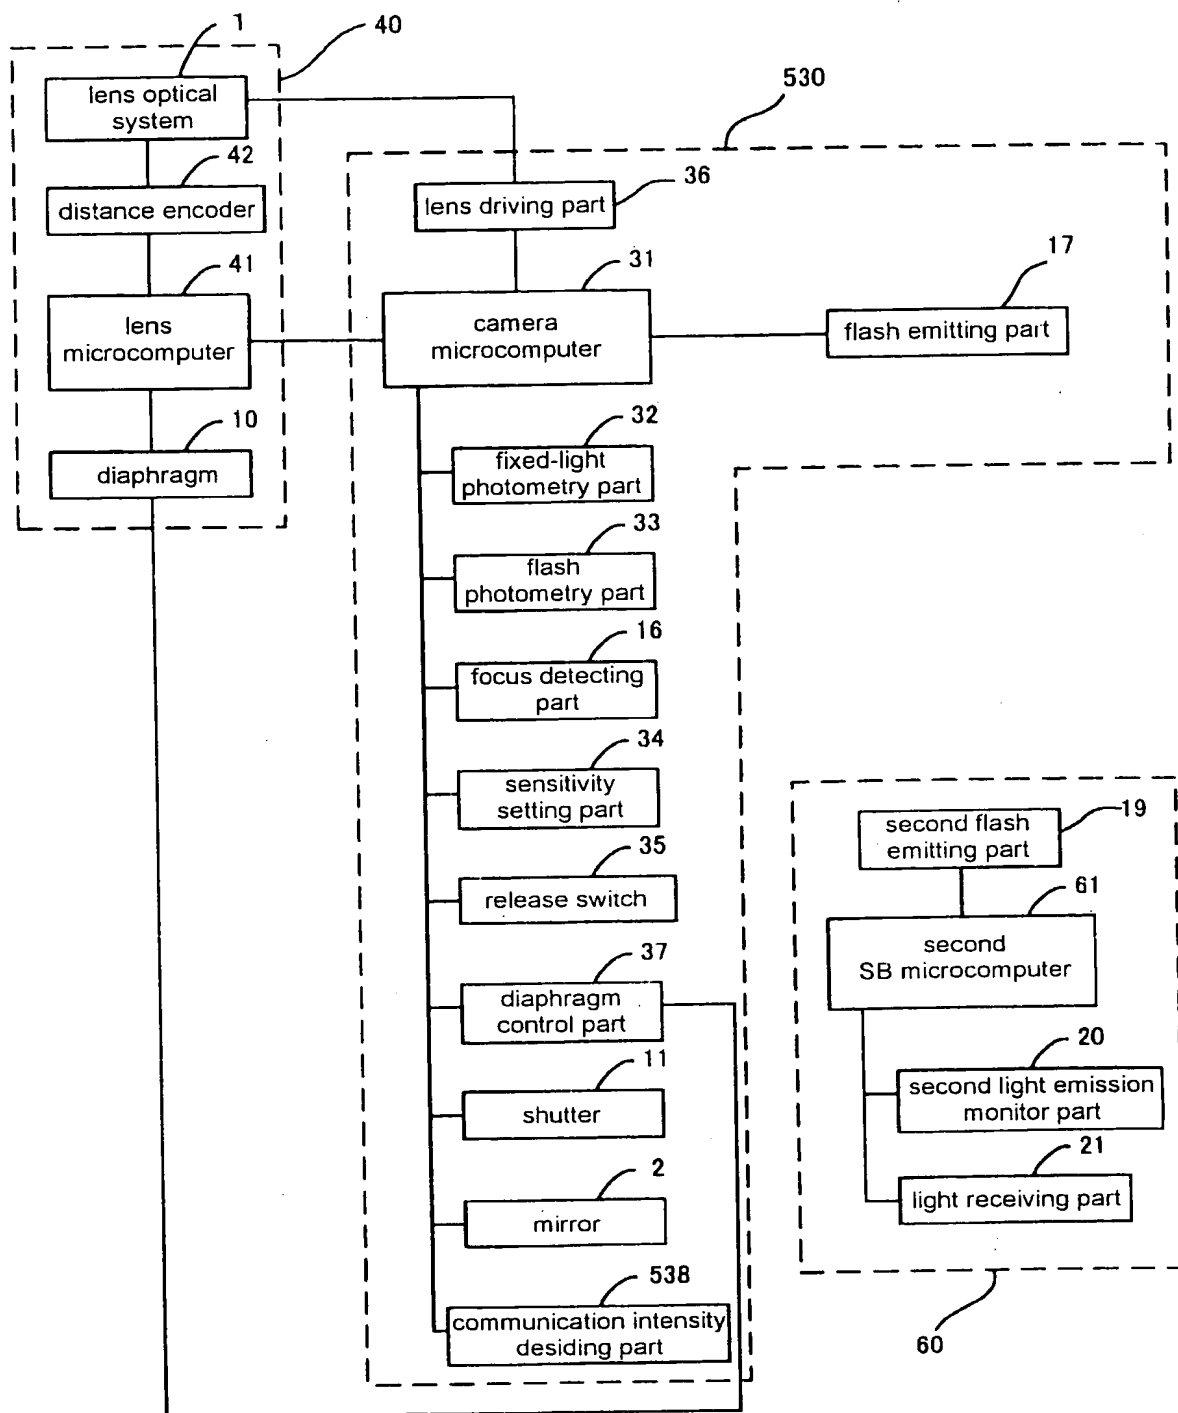


FIG. 30